



Optional sliding
asteroid indicator
upper cover



Technical Specifications

Operating Environment Indoor Environment

Operating Temperature, Humidity -20°C/+68°C (optional -50°C with heat boosting), RH 95% non-condensing.

Operating Density 100%, 24/7 operation.

Material Properties	Body	304 grade satin sandblasted pattern stainless steel (optional 316 grade)
	Top Cover	Locked 10 mm tempered black tinted glass (optional other materials), with an option for a recessed glass cover for reader mountings on the top cover.
	Wing	10 mm tempered glass with RGB LED lighting

Indicators Transition/Direction Indicator: RGB LED underwing and under cover as standard, (optional sliding asteroid animated LED indicators on the top cover).

Energy Operating Voltage : 110/220V AC 50/60 Hz. (%±10), 24V DC. **Power Consumption (single):** Standby ~4W. During transition ~34W **Power Consumption (center)** Standby ~8W. During transition ~34+34W

The system operates in a bi-directional manner. Operating modes can be changed via the dip switch.

Operating Mode Input - output controlled Input controlled, "Input - output free
output free Output controlled, input free

Operating System It is an electromechanical motorized system with electronic torque and sensor control for fast transitions, providing wing movement into the body.
To create a transition corridor, a minimum of two single units must be used.
The electromechanical motorized movable wings are in the closed position by default (can be adjusted to open).
The system works with any third-party access control system connected to the turnstile, performing the person card reading operation. Once transition approval is granted, the wings open, and the person's passage is monitored by multiple sensors along the corridor. After the passage is completed, the wings close.
In consecutive card readings, the passage of individuals is completed without the wings closing, and the wings close only after the last person has passed.
While a person is between the wings, the wings do not move, ensuring no harm to the individual, thanks to the sensors. Additionally, the electronic torque control system is constantly active during the wing closure.
In cases of tailgating and attempted unauthorized passage, the system provides visual and audible alarms. System message codes can be displayed through the built-in diagnostic screen.

Control System The turnstile's all functions, parameters, and operating modes can be changed through the control board (microprocessor-controlled). All inputs are opto-coupler protected.
It can be controlled via dry contact (ground control).
It operates in harmony with any type of access control unit.
Optionally, functions can be controlled via RS232, RS485, or TCP/IP.

Transition Speed **Wing opening/closing time:** ~0.8 seconds
Free passage mode: ~60 people/min (Nominal) ~30 people/min
(The use of different access control systems may alter the nominal passage rate.)

Emergency Mode The wings retract into the body to create a free passage corridor (fail-safe). It operates in harmony with fire alarm systems and similar systems. Once the emergency is over, the system returns to normal operating mode.


Power Outage Status The wings retract into the body using an internal battery, creating a free passage corridor (fail-safe)

Weight **Single** : ~65 kg
Center : ~80 kg

Optional Features and Accessories Wireless remote control (transmitter-receiver), manual control, token slot and bin, single/multiple programmable coin/token slot and bin, reader mounting bracket, heat booster, top cover weight sensor, bottom plate, battery backup, 316 grade stainless steel, RS232-RS485-TCP/IP modules, sliding asteroid animated LED indicators, various external body materials (mirror black, bronze, etc.), motorized card collection unit and card collection bin, etc.

Dimensions (mm)

HG 02 EU: SINGLE UNIT (LEFT or RIGHT)

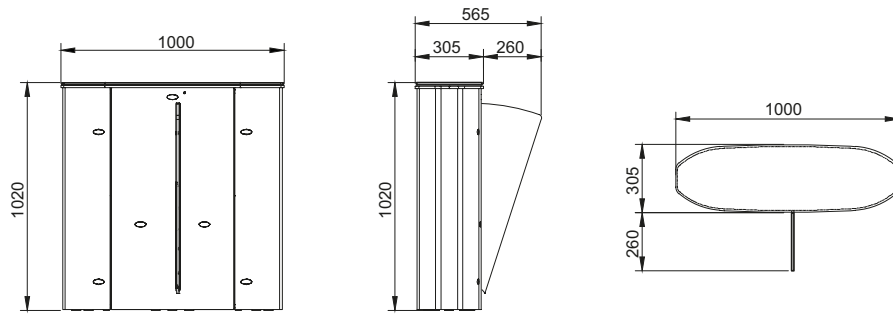

HG 02 EU: CENTER UNIT

