


## SG 300 A Walk Through Metal Detector

### ■ Product Highlights

- \* Stable performance,6-12-18 zones options
- \* Two LED lights bar show threats location on human body
- \* Extremely high sensivity to find even tiny threats
- \* Ip55 weather proof design
- \* Sound and light alarm
- \* Operation way : Remote control



### ■ Dimensional Drawing

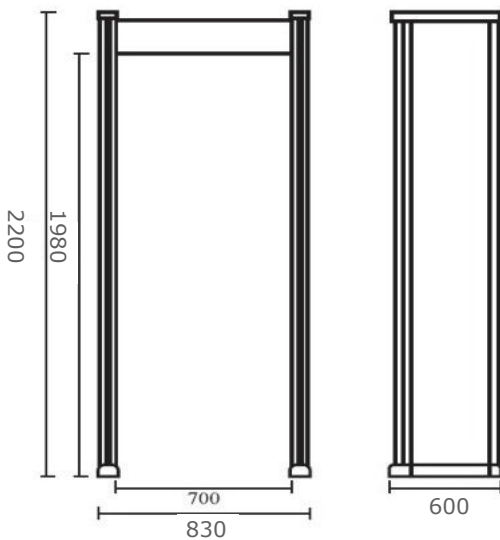

### Important Sizes :

Outer frame Size: 2200\* 830 \* 600mm (L x W x H)

Inner frame Size: 1980\* 700\*600mm(L x W x H)

## Product Details

### General Specifications

<ul style="list-style-type: none"> <li>■ Outer frame</li> <li>■ Inner frame</li> <li>■ Electrical current</li> <li>■ Power</li> <li>■ Unit weight</li> <li>■ Signal Frequency</li> <li>■ Work environment</li> <li>■ Sensitivity adjustable</li> <li>■ Alarm</li> <li>■ Max distance</li> </ul>	<p>2200mm(H) x830mm(W)x600mm(D)            1980mm(H)x700mm(W)x600mm(D)            100 V- 240 V/A            10W            70KG            7000-8999Hz(adjustable)            -20C to +45C            Level 0-299            Sound and light            0.3m at low sensitivity;0.5m at high sensitivity</p>
---	--

### Configuration

<ul style="list-style-type: none"> <li>■ Remote control transmitter</li> <li>■ Master control board</li> <li>■ Light bar</li>   <li>■ Digital display board</li> <li>■ Speaker</li> </ul>	<p>Metal-detect-door-mainbd,rev120+remote control receiver            White,            Long bar,Metal-detect-door -Ledbd,V040            Short bar, Metal-detect-doo-Ledbd,V010            Minni-a door oanel board, REV040            Loudspeaker,8Ω2W,Black,75mmx32mmx27mm</p>
---	---

### Software

<p>Operation way Seansibility</p>	<p>Remote control only            With the highest sensibility, it can detect the metal Article as small as the clip.            With the range of 0-100, it can be adjusted the Sensibility easily, pre-set the weight, volume, size and location in respect of the metal Articles and eliminate the false alarming for the coin, key, jewelry, leather belt button, etc.</p>
<p>Infrared counting Alarm settings Detecting areas</p>	<p>The intelligent counter can calculate the number of the Passenger flow and the times of alarming.            eight kind of alarm sound            Allocation of six mutual over-lapping detecting areas, Simultaneous alarming from multi-areas and accurately ascertaining the location Of the metal articles according to the layout of the metal articles.</p>

### Operating Environment

<p>Operation temperature/Humidity            Storage temperature/Humidity            Operation Power</p>	<p>5C-40C / 0%-90%(non-condensing)            -20C-55C / 0%-98%(non-condensing)            220VAC(±10%) 50±3Hz (Optional: 100VAC,110VAC,120VAC,200VAC)</p>
--	--