

Product Model :

PL 150

MOTORIZED SWING GATE TURNSTILE

Powerfull Mechanism

Elegant Design


Long Lasting

Disabled Access

VIP Access

Spare Parts Support

LED and Logo Application

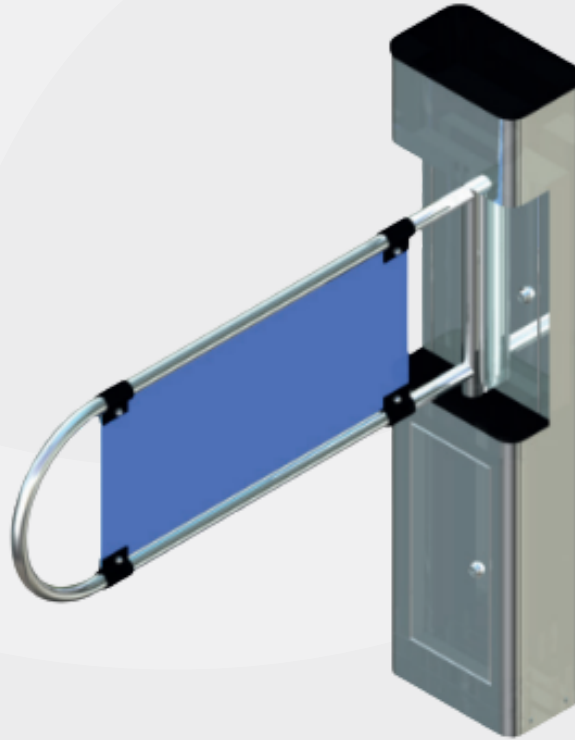

■ SPECIFICATIONS

PL 150

MOTORIZED SWING GATE TURNSTILE

PL 150 MSWG is used as an alternative passage lane for wheelchair users and VIP access. With its elegant design and appearance, it can be used in any indoor environment.

Application	PL 150 MSWG is used as a VIP lane in various indoor environments such as banks, ministries, administrative offices, public transportation centers, business centers, and other similar areas.
Basic Materials	PL 150 MSWG turnstile main body is made of 304-grade stainless steel, and the wing is made of a 25 mm diameter 304-grade stainless steel tube. Inside the wing, there is a 3 mm thick blue plexiglass material. Optionally, LED indicators can be added to the top cover, and logo application can be applied to the wings. The electronic boards are developed by Polimek engineers and are designed to operate in various integrations and different modes with a special PLC.
General Usage	PL 150 MSWG turnstile operates in both directions. Any access control device such as a card reader, biometric reader, remote control, or button can be connected via a simple dry contact. When access is granted, the PL 150 MSWG turnstile automatically opens 90°. It remains open for 15 seconds before closing and locking itself again. This open waiting time can be adjusted through PLC settings. The PL 150 MSWG turnstile is recommended to be installed alongside Polimek tripod turnstiles for main access points and is particularly suitable for disabled and VIP passages.
Security	PL 150 MSWG turnstile is designed to keep the wing open in both directions in case of a power outage, allowing free passage. If the turnstile is optionally equipped with a battery, it will continue to operate in its standard mode for a certain period during a power failure.

SPECIFICATIONS

Control / Operating Voltage	100-230 VAC 50/60 Hz
Power Consumption	30 W
Operating Temperature	- 10° C - + 50° C
Passage Speed	20-30 Personn / Munite
Weight	25 Kg
Usage Areas	Indoor
Body	304 Stainless Steel
Wing Length	850 mm
Wing	3 mm Blue Plexyglass
Optional Accessories	Biometric reader, card reader, button, remote control
Security Level	●●○○○

